



IMMANUEL LUTHERAN COLLEGE

 THROUGH CONNECTION,
COURAGE IS CREATED

Situated among 23 hectares of the picturesque Bunderim is Immanuel Lutheran College, Sunshine Coasts most reputable and innovative schools.

The learning spaces have been thoughtfully designed with a focus on openness, ventilation, and a strong connection to the natural world.

The integration of the Series 406 Single Glazed FrontGLAZE™ Fixed Windows/Highlights and

Louvres flood the interiors with ample natural light, creating bright and uplifting environments conducive to both learning and creativity. Research shows that natural light, coupled with elements of biophilic design, not only enhances productivity but also fosters a sense of well-being.

AWS | PROJECT FEATURE

The Series 704iD SlideMASTER™ Internal Sliding Door used as classroom dividers creates spacious, well-ventilated rooms for fresh air to circulate freely, ensuring comfort and promoting concentration. This intentional design encourages minds to flow freely, fostering innovative ideas and inspired thinking.


By harmonising architectural elements with natural surroundings, these spaces become more than just classrooms—they evolve into dynamic hubs where students feel nurtured and empowered. The result is a seamless blend of functionality and aesthetics, designed to inspire learners and create an environment where creativity and collaboration thrive.

Beyond academics, “We believe in raising joyful, confident learners and our exceptional staff care for each student’s social, emotional and spiritual wellbeing, every day.”

Winner: Master Builders – Commercial
Refurbishment/Renovation \$5million – \$15million.

For the full gallery, visit:
awsaustralia.com.au/elevatealuminium

Architect: Brickerton Masters Architecture. Builder: InSite Construction. Photographer: David Kekwick

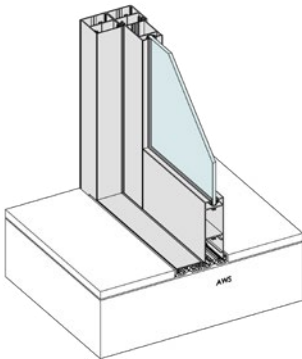

AWS SERIES 704iD SLIDEMASTER™ INTERNAL SLIDING DOOR

- × The 704iD is a bottom-rolling sliding door designed for internal applications. Not for use on the external wall.
- × Available in 102mm, 150mm, 200mm and 50mm single track.
- × The low sill line is disability access compliant under AS1428.
- × Available in a variety of configurations including cavity door.
- × Clean square lines with soft radius edges on meeting stile corners. Pocket fillers on head, sill and jambs keep the visual appearance consistent throughout the door.

Maximum Panel Height: 3000mm
Maximum Panel Width: 2000mm
Maximum Glass Thickness: ≤24mm



At CHGA Windows & Doors we are more than just a window and door company: Our ethos is to provide a reliable end-to-end service as supplier – creating long-term relationships for our customers and builders.

Phone: 07 5492 7730 | Web: chga.com.au

2D & 3D CAD Files Available | Download from specifyaws.com.au to use in your projects.

